


ZT2903-A

Cash Deposit Machine



Jemmy Hasan
0811-9508-881

Jakarta
Ruko Sedayu Square Blok M 23-25 Jl. Outer Ringroad
Lingkar Luar Kel. Cengkareng Barat, Kec. Cengkareng
Jakarta Barat 11730

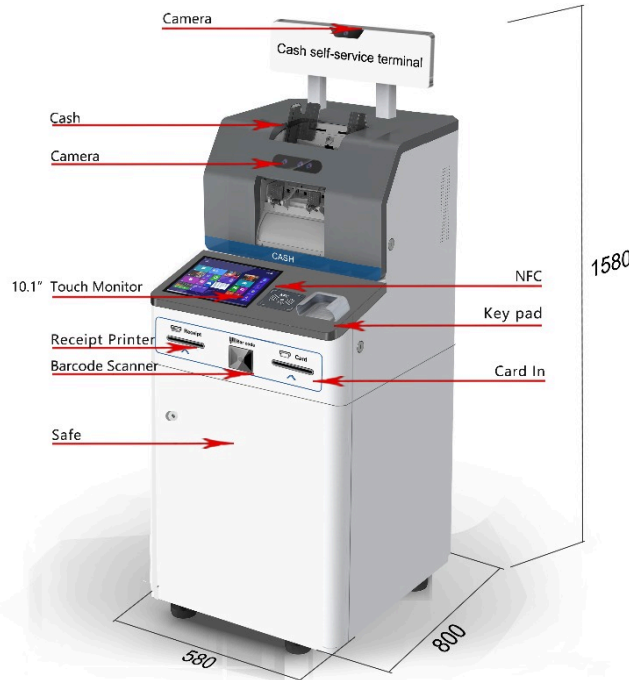

ZT2903-A

Cash Deposit Machine

Features & Size

Main Specification

Processing & Display Unit

Industrial Control Host Computer:

- Model: SV3b-10U26-1065G7
- Storage: 512G SSD
- Memory (RAM): 16G Module
- Operating System: Genuine Windows 11 IoT Enterprise LTSC

Touchscreen Display:

- Type: 10.1-inch Capacitive Touch All-in-One Screen
- Resolution: 1280x800 (16:9 Aspect Ratio)
- Interfaces: VGA, HDMI
- Power Input: DC12V

Camera & Scanning

Industrial Control Host Computer:

- Model: SV3b-10U26-1065G7
- Storage: 512G SSD
- Memory (RAM): 16G Module
- Operating System: Genuine Windows 11 IoT Enterprise LTSC

Touchscreen Display:

- Type: 10.1-inch Capacitive Touch All-in-One Screen
- Resolution: 1280x800 (16:9 Aspect Ratio)
- Interfaces: VGA, HDMI
- Power Input: DC12V

Power & Physical Structure

Cabinet: Cold-rolled steel metal, spray-painted finish.

Power Module: Input 85 ~ 264VAC, Output 12VDC, 12.5A.
(Certified: CE, UL, CCC).

UPS Power Supply: 1KVA, 220V, Serial port communication.

Speaker: Dual-channel 4Ω 5W, Input 12VDC.

Multi-Functional Control Module: Supports access control + indicator lights + human motion sensor.

Mechanical Code Lock: Included.

Financial & Transaction Modules

Cash Dispensing Module:

- Capacity: Inlet 500 notes, Outlet 100 notes, Reject bin 100 notes.
- Storage Bag Capacity: 30,000 notes.
- Sorting Speed: ≥ 720 notes/minute.
- Features: Banknote serial number identification.
- Connectivity: USB + Serial Port + Ethernet Port.

Motorized Card Reader:

- Functions: Supports Magnetic card read/write, Contact IC card read/write, Contactless IC card read/write.
- Standards: Compliant with EMV 4.0 Level 1 standard.
- Security: Motorized card intake/ejection, back-end card retention support, magnetic card anti-skimming protection.
- Power: DC24V, USB communication.

NFC Card Reader:

- Functions: RF card reader & SAM card reader functionality.
- Operating Distance: ≥ 40 mm.
- Frequency: 13.56 MHz (Supports 125K EMID cards).
- Slots: 2 SAM card slots.

Metal Encryption Keypad (EPP):

- Design: Debossed perimeter, blind spots/Braille on keys (X, I, O), English letters/numbers.
- Dimensions: Panel size 87.4 x 91.4 x 2mm.
- Connectivity: Supports RS232 and direct USB communication.
- Certification: Supports PCI certification.

Printing

Receipt Printer:

- Method: Line thermal printing.
- Speed: 150mm/s (Max) to 220mm/s (Max).
- Print Density: 8 dots/mm.
- Paper Specs: Easy loading, Width 79 $\pm$ 0.5mm.