


Luxury high speedlane servo motor swing barrier HZ-1286




Face recognition device
(panel)/DF101



Face recognition device
(column)/DF102

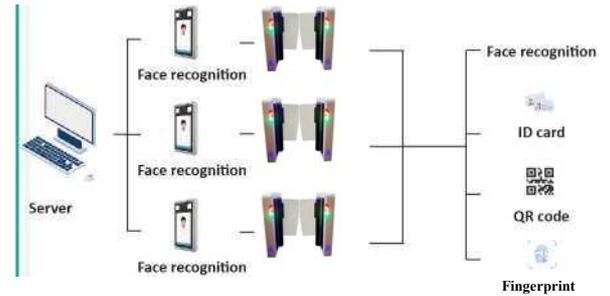

Product Size

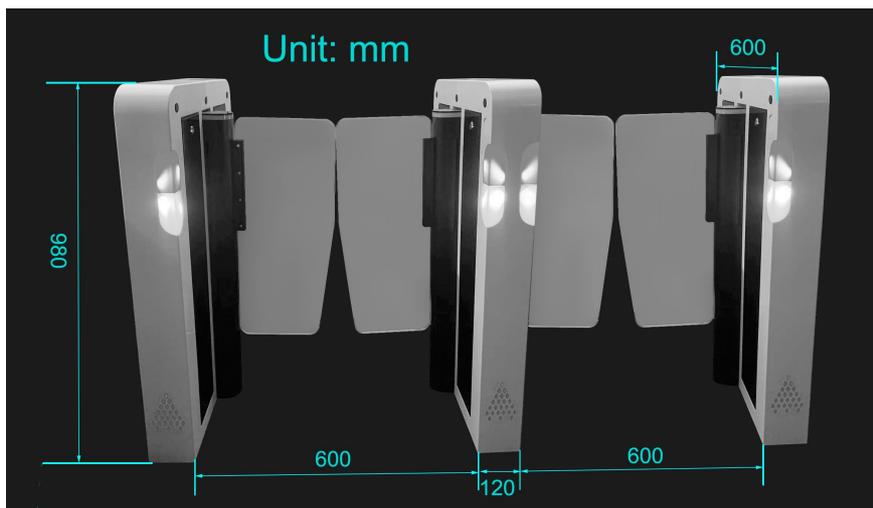


Parameters

Material	1.5/2.0mm SUS304 with paint
Size	600x120x980mm
Sensor pairs	3
Pass rate	60p/m
Pass width	600mm
Input voltage	100V~240V
Motor type	24V DC servo motor
Environment	•20~+70°C
Motor power	35W
Input signal	Dry contact/RS485

Functions & Features

- Reasonable and reliable design, No noise, Sound off, smooth operation and long service life;
- With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- With functions of anti-tail, anti-reverse pass and so on;
- Card can be set "with memory" or "without memory" functions;
- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- With infrared anti-clip function (anti-clip when gate is open or running);
- Compatible with IC, ID card, scanning and face recognition, etc.
- Two modes of operation are available: open or closed.
- Various working modes are available, including two-way card reading and one-way card reading, etc.

Customer comes first/Quality-based /Teamwork/Respect for individuals

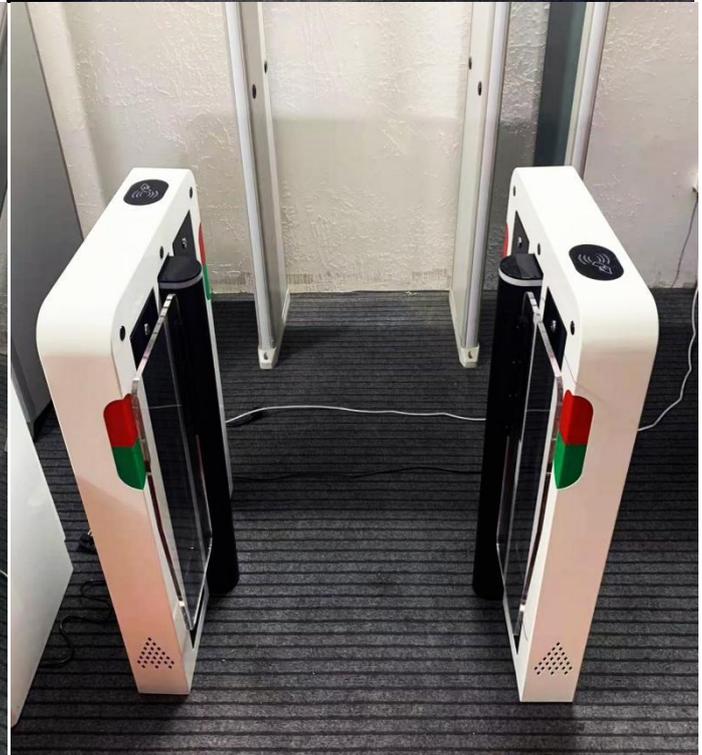

Jemmy Hasan
0811-9508-881

Jakarta
Ruko Sedayu Square Blok M 23-25 Jl. Outer Ringroad
Lingkar Luar Kel. Cengkareng Barat, Kec. Cengkareng
Jakarta Barat 11730