Putra Mandiri Informatika

RANGER 2

Rugged Mobile Computer

Full-Screen Enhances Overall Business Efficiency

MOVFAST

Superior Scanning Technology to Boost Productivity

60ms
Capture Speed

20 Barcodes
Barcodes at Once

OCTA CORE

Smooth and Fast

5000 mAh

12h+

Built for Durability

1.5m

IP67

Effortless Device Management

▪ Supports Various Iot Cloud Platforms and Browsers

▪ One SDK for Efficient Device Configuration

Angel Watch

airwatch by vmware

SOTI

android enterprise recommended

Google Mobile Service

SOTI MOBICONTROL

TeamViewer

ivanti

Wi·Fi CERTIFIED

Barcode Utility
Easily Configure Scanner and Barcode Decoding Performance
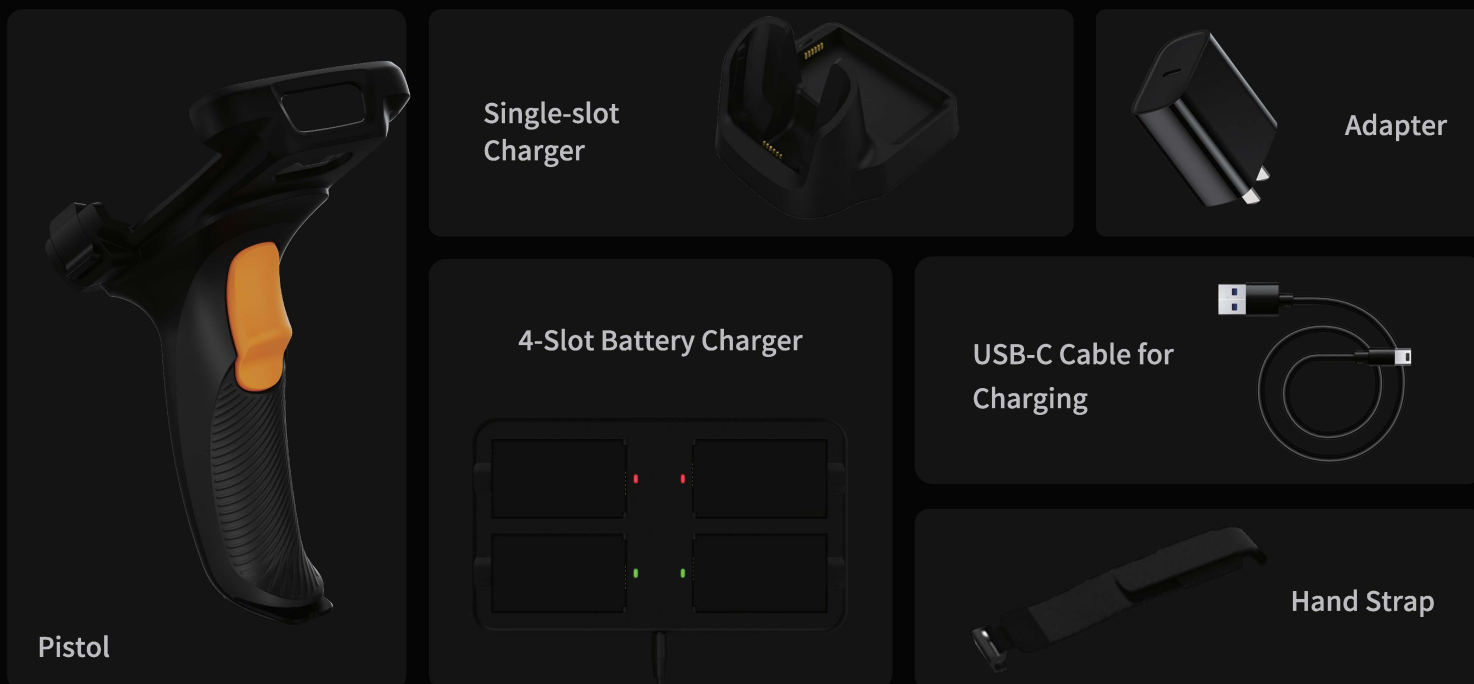
Kiosk
Restrict User Access and Usage Permissions

DataWedge
Efficiently Transfer and Install Files on the Device

Movstage
A QR Code Configuration App for Device Settings

» OPTIONAL ACCESSORIES*

Pistol

Single-slot Charger

Adapter

4-Slot Battery Charger

USB-C Cable for Charging

Hand Strap

*Our products are being upgraded. Please check our official channels for updates.

» PARAMETERS

Processor Octa-core 4*A53@2.0GHz+ 4*A53@1.5GHz	**OS** Android 13.0 upgradable to Android 15.0	**Memory** 4 GB RAM/64 GB Flash; (Default) 3 GB RAM/32 GB Flash; 6 GB RAM/128 GB Flash	**SIM** Dual SIM Cards	**Expansion Slot** Micro SD Card (up to 256GB)
Display 5.45 Inches	**Camera** Rear: 13MP, AF, 1A Flash Front: 2MP	**Battery** Li-Ion, 3.85 V 5000 mAh Polymer	**Audio** Microphone Speaker Receiver	**Charging** Type-C and POGO Charging, Supporting 18W Fast Charging
Prompt Facility Speaker Vibration Prompt LED Prompt	**Sensors** G-sensor;Proximity Sensor;Light Sensor; E-Compass;Gyroscope; Hall Sensor	**Scanner** XC E4 Zebra 4710	**Barcode** one-dimensional two-dimensional barcode	**FOV** Horizontal: 42.0° Vertical: 26.8°
Motion Tolerance 6m/s	**Network** 2G: B3/5/8 3G: B1/5/8;34/39; 4G:B1/3/5/7/8/20/34/38 /39/40/41	**WLAN** IEEE 802.11 a/b/g/n/ac	**Buletooth** Bluetooth Class 5.0	**GPS** GPS/AGPS/ Beidou/Galileo/ GLONASS/QZSS
USB Type-C *1	**OTG** Yes	**NFC** Frequency: 13.56MHz Distance: Within 2-4mm TCP: ISO14443A /14443B/15693	**Size** 151*73*14mm	**Vibration Motor** Yes

Environment Operating Temperature: -20℃ ~ 60℃ Storage Temperature: -40℃~70℃ (Battery not included) Humidity: 5%~95% Non-condensing	**Weight** 239g (Battery Included)	**Protect Grade** Drop Standard: Multiple Falls on the 1.5m Marble Floor Roll Drop Standard: 1000 Times of 0.5-meter Roller Drop International Protection: IP67 Electrostatic Discharge: Contact:±8KV, Air:±15KV